

# PCI-1620A/AU


# PCI-1620B

# PCI-1620U

**8-port RS-232 PCI Communication Card/  
8-port RS-232 Universal PCI COMM Card**

**8-port RS-232 PCI Communication Card,  
w/Surge Protection**

**8-port RS-232 Universal PCI Communication  
Card, w/Surge Protection**

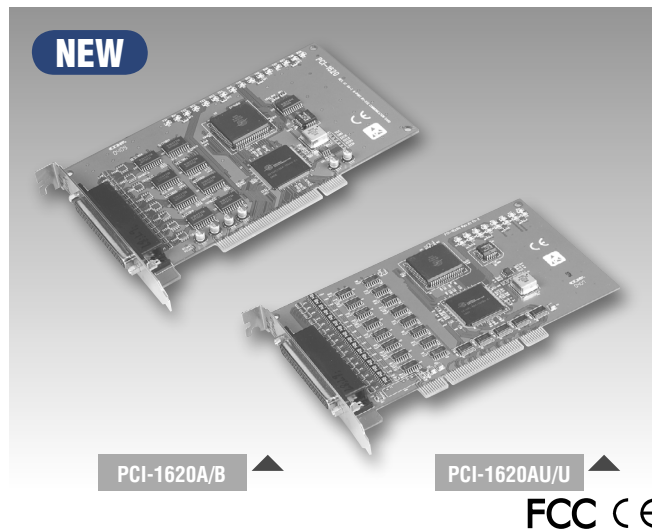

## Features

- PCI bus specification 2.1, 2.2 (PCI-1620U, PCI-1620AU) compliant
- Speeds up to 921.6 kbps
- 8-port RS-232
- I/O address automatically assigned by PCI Plug & Play
- OS supported: Windows® 98/ME/2000/XP/XP Embedded, Linux®
- Interrupt status register for increased performance
- Powerful and easy-to use utility (ICOM Tools)
- Universal PCI (Supports 3.3 V or 5 V PCI bus signal) (PCI-1620AU, PCI-1620U)

## Introduction

PCI-1620 is an 8-port RS-232 PCI communication card that is compatible with the PCI 2.1 bus specification. The card provides eight optional surge protected RS-232 ports, and has many functions such as high transmission speed of 921.6 kbps, eight independent RS-232 ports and also comes with high-performance 16PC1954 UARTs with 128-byte FIFO and a 16C954 UART to reduce CPU load. Thus, the PCI-1620 is especially suitable for making your system reliable in multitasking environments.

PCI-1620AU and PCI-1620U have a universal PCI connector that is compatible with both 3.3 V signaling and 5 V signaling. This means that PCI-1610AU and PCI-1620U can not only be used in traditional systems with 5 V signaling but also newer systems with 3.3 V signaling.

To further increase reliability, PCI-1620B and PCI-1620U offer surge protection technology, protecting your system from abrupt high voltages of up to 3,000 V<sub>DC</sub>. Advantech also provides a convenient utility program called ICOM Tools, to help you test the PCI card's performance by analyzing the port status. ICOM Tools is easy to use with its menu commands and toolbar buttons, and acts as a PC-based data scope that lets you set a trigger condition, capture the communications data and monitor the signal status. ICOM Tools is applicable to all series of Advantech ICOM cards.

## Specifications

### General

• <b>Bus Type</b>	PCI-1620A, PCI-1620B: PCI V2.1 PCI-1620AU, PCI-1620U: Universal PCI V2.2	
• <b>Certifications</b>	CE, FCC class A	
• <b>Connectors</b>	1 x DB62-F	
• <b>Dimensions</b>	185 x 100 mm (7.3" x 3.9")	
• <b>Power Consumption</b>		
<b>Typical</b>	+12 V: 120 mA	+5 V: 180 mA
<b>Max</b>	+12 V: 150 mA	+5 V: 220 mA
• <b>Power Requirement</b>	±12 V	

### Communications

• <b>Communication Controller</b>	16PC1954+16C954	
• <b>Data Bits</b>	5, 6, 7, 8	
• <b>Data Signals</b>	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND (RS-232)	
• <b>FIFO</b>	128 bytes	
• <b>Flow Control</b>	RTS/CTS, Xon/Xoff	
• <b>IRQ</b>	Assigned by Plug & Play	
• <b>Parity</b>	None, even, odd	
• <b>Speed</b>	50 bps ~ 921.6 kbps	
• <b>Stop Bits</b>	1, 1.5, 2	

### Protection

• <b>ESD Protection</b>	16 kV
• <b>Surge Protection</b>	3,000 V <sub>DC</sub> (PCI-1620B) 2,500 V <sub>DC</sub> (PCI-1620U)

### Software

• <b>Bundled Software</b>	ICOM Tools
• <b>Driver Support</b>	Windows 98/ME/2000/XP/XP Embedded, Linux

### Environment

• <b>Operating Temperature</b>	0 ~ 65° C (refer to IEC 68-2-1,2) (32 ~ 149° F)
• <b>Humidity (Operating)</b>	5 ~ 95 % RH, non-condensing (refer to IEC 68-2-3)
• <b>Storage Temperature</b>	-25 ~ 85° C (-13 ~ 185° F)

## Ordering Information

• <b>PCI-1620A</b>	8-port RS-232 PCI COMM Card (cables not included)
• <b>PCI-1620B</b>	8-port RS-232 PCI COMM Card, w/surge protection (cables not included)
• <b>PCI-1620AU</b>	8-port RS-232 universal PCI COMM Card (cables not included)
• <b>PCI-1620U</b>	8-port RS-232 universal PCI COMM card w/surge protection (cables not included)
• <b>Opt8C</b>	8-port RS-232 cable with male DB62 to DB25 connector (1 m)
• <b>Opt8H</b>	8-port RS-232 cable with male DB62 to DB9 connector (1 m)
• <b>OPT8AP</b>	8-port RS-232(DCE) connection box with female DB25 connectors
• <b>OPT8BP</b>	8-port RS-232(DTE) connection box with male DB25 connectors
• <b>OPT8FP</b>	8-port RS-422 to RS-232 converter connection box with Isolation Protection